


# HEAT-SHRINKABLE TUBING


## HTS-STSE-C4-X

SUMITUBE<sup>®</sup>, Heat-shrinking solder termination sleeve, RoHS and REACH compliant, Made of Polyolefin, Thermoplastic, Alloy and Flux

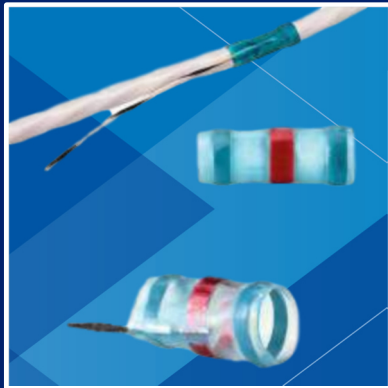

### Highlights

- Temperature range - 55 °C to +125 °C
- Self-extinguishing
- Excellent sealing due to their sealing rings
- Good resistance to chemicals and solvents
- Meltable sealing rings made of thermoplastic
- Alloy - Bi5B eutectic at 138 °C. Per ANSI-J-STD-006
- FLUX - ROM1 type RA flux for silver or tin applications. Per ANSI-J-STD-004
- Shrink temperature: > 138 °C
- Colour: transparent
- RoHS and REACH conform (!!!)

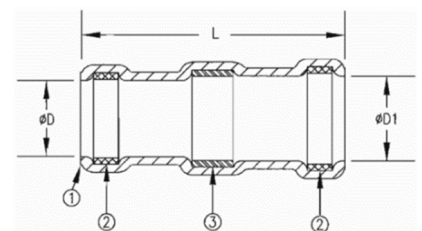

### Dimension

Art.-No.	Art.-Name	L mm (nom)	ØD mm (nom.)	ØD1 mm (nom.)
ZXXXXX	STS-E-C4-1	28,5	1,8	2,4
ZXXXXX	STS-E-C4-2	28,5	2,7	3,2
ZXXXXX	STS-E-C4-3	28,5	4,3	5,1
ZXXXXX	STS-E-C4-4	28,5	5,6	6,5
Z85667	STS-E-C4-5	28,5	6,6	7,6



Art.-Name	Cable preparation measurements				
	ØD2 mm (max.)	ØD3 mm (min.)	ØD4 mm (max.)	ØD4 mm (min.)	L2 mm (Range)
STS-E-C4-1	2,4	0,9	1,9	0,5	6,4 - 8,3
STS-E-C4-2	3,2	1,4	2,8	0,8	6,4 - 8,3
STS-E-C4-3	5,0	2,2	4,6	1,3	6,4 - 8,3
STS-E-C4-4	6,0	3,3	6,0	1,8	6,4 - 8,3
STS-E-C4-5	7,6	4,3	7,1	2,5	6,4 - 8,3

Created by: VS 20.11.2020

We reserve the right to make product changes.

**RELIABLE, FLEXIBLE, CUSTOMER-ORIENTED**

**HEINRICH THULESIUS GMBH & CO. KG**  
Zum Panrepel 15, D-28307 Bremen, GERMANY



#### SERVICE

Tel: +49 (0) 421-4895-0  
Fax: +49 (0) 421-4895-225  
E-Mail: [info@thulesius.de](mailto:info@thulesius.de)  
[www.thulesius.de](http://www.thulesius.de)