


CABLE TIES

HTB-LK

BarLok®-Cable Tie Ladder Style, light und flexible

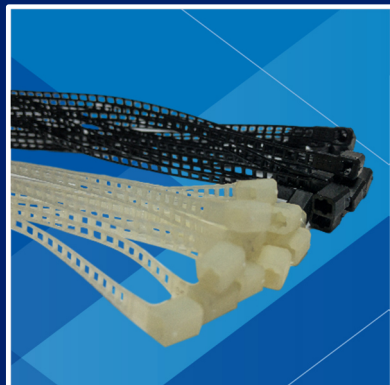

Highlights

- Temperature range from - 40 °C up to 85 °C
- Light weight, high tensile strength
- Extreme flexible
- No sharp edges, as the cut end will retract into the head by itself
- Self-extinguishing
- Excellent resistance against many chemicals
- Wheatherproof in black
- Approval: UL, VG

Dimensions

Art.-No. natural	Reference	Cable Tie (mm)		Bundle Diameter mm / max.	Loop Tensile Strength min. kg	MIL- Standard	VG- Approval
		Length	Width				
Z80011	HTB-LK-200	200	3.60	45	18.2	-	-
Z80051	HTB-LK-300	300	3.60	76	18.2	-	96212

Natural; heat stabilized (black) version on request.

Technical characteristics

Property	Test	Inspection requirements
Material	Polyamid 6.6, wheatherproof, black Polyamid 6.6, heat stabilized, black	
Thermal	Operating temperature Operating temperature Melting point	-40 °C - 85 °C natural und black -40 °C - 105 °C heat stabilized, black Ca. +250 °C
Chemical	Flammability	Self-extinguishing, Flammability rating: V-2

Created by: NH 03042020

We reserve the right to make product changes.

**RELIABLE, FLEXIBLE,
CUSTOMER-ORIENTED**

HEINRICH THULESIUS GMBH & CO. KG
Zum Panrepel 15, D-28307 Bremen, GERMANY



SERVICE

Tel: +49 (0) 421-4895-0
Fax: +49 (0) 421-4895-225
E-Mail: info@thulesius.de
www.thulesius.de

**SUMITOMO
ELECTRIC
GROUP**