


## CABLE TIES

### HTB-SU

BarLok®-SUPER Cable Ties, extreme light with high tensile strength

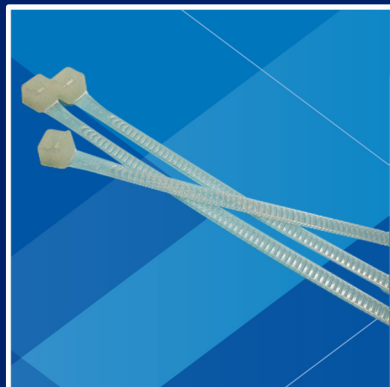

#### Highlights

- Temperature range  
- 40 °C up to 85 °C
- Extreme light with high tensile strength
- Pre-curved tongue for easy assembly
- Extreme flexible
- Self-extinguishing
- Excellent resistance against many chemicals, oils and greases
- Weatherproof in black
- Approval: UL, MIL

#### Dimensions

Art.-No. natural	Reference	Cable Tie (mm)		Bundle diameter mm / max.	Loop tensile strength min. kg	MIL-Standard	VG-Approval
		Length	Width				
Z80113	HTB-SU-190	194	4.80	45	22.7	MS-3367-1	-
Z80156	HTB-SU-385	384	5.00	102	22.7	MS-3367-2	-

Standard: natural, heat stabilized (black) version on request.

#### Technical characteristics

Property	Test	Inspection requirements
Material	Polyamid 6.6, weatherproof, black	
	Polyamid 6.6, heat stabilized, black	
Thermal	Operating temperature	MIL-S 23190D and UL, -40 °C - 85 °C natural and black
	Operating temperature	MIL-S 23190D and UL, -40 °C - 105 °C heat stabilized, black
	Melting point	ca. +250 °C
Chemical	Flammability	Self-extinguishing, Flammability rating: V-2

Created by: NH 03042020

We reserve the right to make product changes.

**RELIABLE, FLEXIBLE,  
CUSTOMER-ORIENTED**

**HEINRICH THULESIUS GMBH & CO. KG**  
Zum Panrepel 15, D-28307 Bremen, GERMANY



#### SERVICE

Tel: +49 (0) 421-4895-0  
Fax: +49 (0) 421-4895-225  
E-Mail: [info@thulesius.de](mailto:info@thulesius.de)  
[www.thulesius.de](http://www.thulesius.de)

**SUMITOMO  
ELECTRIC  
GROUP**