


## CABLE & WIRE

### HAN- H07RN-F Rubber insulated cable

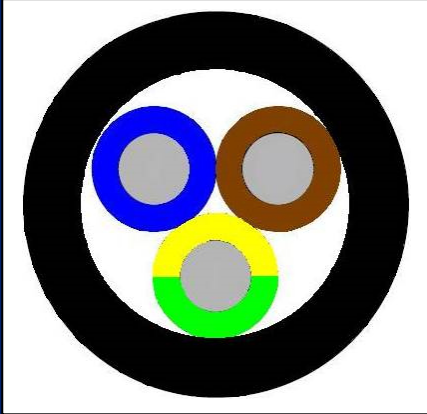

#### Highlights

Heavy rubber insulated cable for use on tools and devices in dry and humid rooms, as well as outdoors in polluted water. Also for fixed installation on plaster or on machine parts. The cable is UV- and ozone resistant, and largely resistant to oils.

#### Construction

Conductor:	stranded bare copper wires acc. IEC 60228 cl. 5
Core insulation:	rubber
Core identification:	acc. DIN VDE 0293 part 308
Outer sheath:	rubber
Sheath colour:	black

#### Technical Data

Nominal Voltage:	U <sub>0</sub> /U: 450V/750V
Test Voltage:	2.500 V
Temperature range:	fixed installation: -25 °C up to +60 °C flexible application: -25 °C up to +60 °C
Minimum bending radius:	fixed installation: 4 x d flexible application: 6 x d
Flame resistance:	VDE 0482-332-1 / IEC 60332-1-2

#### Packaging

Drums or reels, also in cut lengths

Created by: PK/NH 03042020

We reserve the right to make product changes.

**RELIABLE, FLEXIBLE,  
CUSTOMER-ORIENTED**

**HEINRICH THULESIUS GMBH & CO. KG**  
Zum Panrepel 15, D-28307 Bremen, GERMANY



#### SERVICE

Tel: +49 (0) 421-48 95-0  
Fax: +49 (0) 421-48 95-225  
E-Mail: [info@thulesius.de](mailto:info@thulesius.de)  
[www.thulesius.de](http://www.thulesius.de)

## CABLE & WIRE

### HAN- H07RN-F Rubber insulated cable

#### Dimension

No. of cores	Cross section mm <sup>2</sup>
1	1.50 - 300.0
2	1.00 - 6.00
3	1.00 - 50.0
4	1.00 - 185.0
5	1.50 - 70.0
7	1.50 - 2.50
12	1.50 - 2.50
19	1.50 - 2.50
24	1.50

Further dimensions available on request.  
The most usual dimensions are available from stock.

Created by: PK/NH 03042020

We reserve the right to make product changes.

**RELIABLE, FLEXIBLE,  
CUSTOMER-ORIENTED**

**HEINRICH THULESIUS GMBH & CO. KG**  
Zum Panrepel 15, D-28307 Bremen, GERMANY



#### SERVICE

Tel: +49 (0) 421-4895-0  
Fax: +49 (0) 421-4895-225  
E-Mail: [info@thulesius.de](mailto:info@thulesius.de)  
[www.thulesius.de](http://www.thulesius.de)

**SUMITOMO  
ELECTRIC  
GROUP**